


Dewatering Tube™ Standard Drawing

The purpose of a Dewatering Tube™ is to collect sediment contained in the discharged water, to prevent the scour and erosion from water exiting a pipe at high velocity, to defuse the water over a wider area to minimize erosion as the water drains away, and to retain oil contained within effluent.

A SedCatch® Dewatering Tube™ or approved equal should be used anytime water is pumped on the site.

SedCatch® Dewatering Tube™

www.SedCatch.com

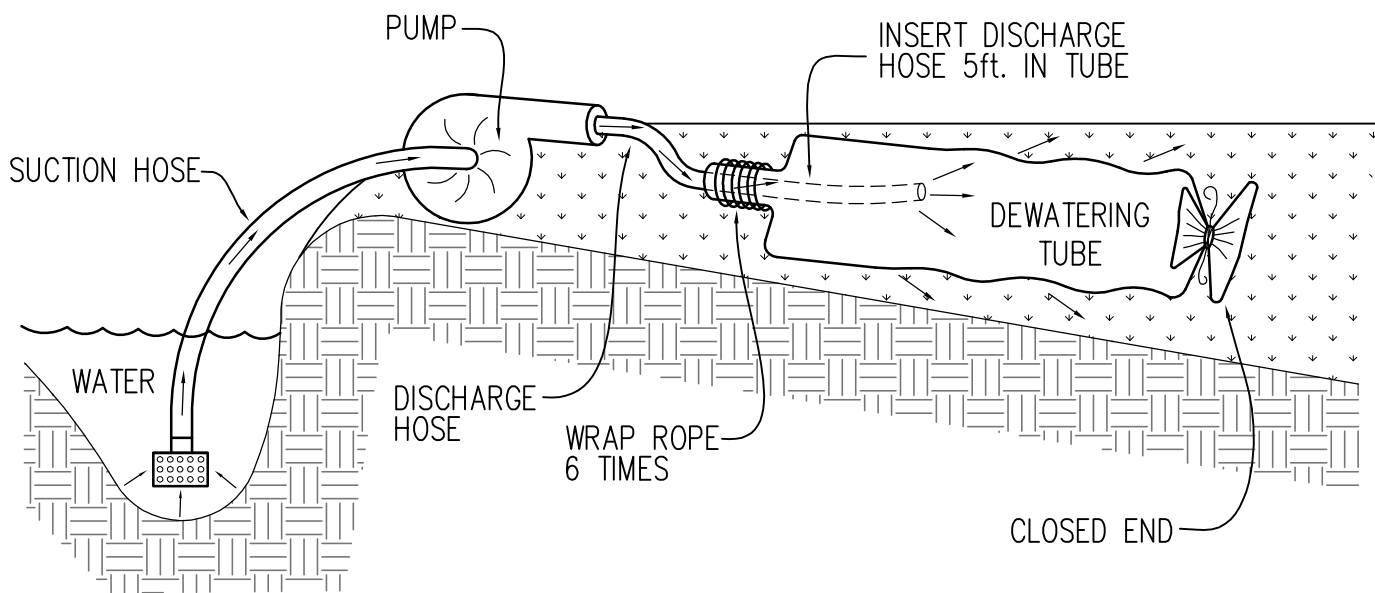

Installation and Use:

1. Place SedCatch® Dewatering Tube™ on the ground or on a trailer over a relatively level, stabilized area.
2. Insert discharge pipe a minimum of 5ft. inside SedCatch® Dewatering Tube™ and secure with a rope (included) wrapped 6 times around the snout over a 6 inch width of the bag. To close and open end of the Dewatering Tube™: Overlap the tube 2 ft. from the end. Gather the center of the doubled-up portion forming a bow tie. Secure with a rope wrapped multiple times.
3. Empty SedCatch® Dewatering Tube™ when half full of sediment or when the sediment has reduced the flow rate of the pump discharge to an impractical amount.

Maintenance and Disposal:

1. Remove and dispose of accumulated sediment away from waterways or environmentally sensitive areas. Open both ends of the SedCatch® Dewatering Tube™, pick it up in the center and dump accumulated sediment out of both ends. Allow to dry and store for re-use OR; as directed by engineer or inspector.