
Floc Hog 500G484 Quick Guide

The Floc Hog© systems are designed for easy setup and quick deployment. They can be used with many different types of pumps and connections and will deliver many hours of operation. Please check that all the parts are present and only use this equipment with approved polymers and tools. Patent Pending

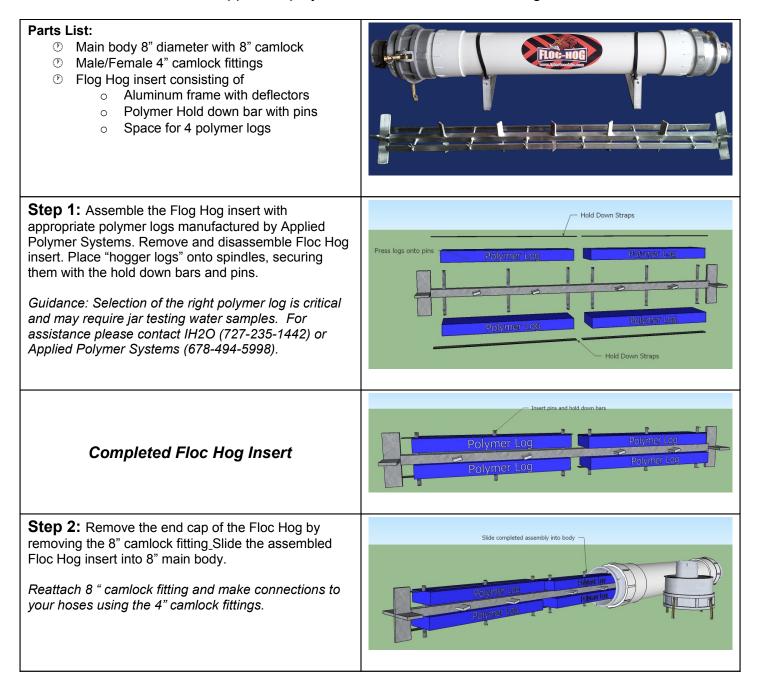


Water Matrix and Floc Hog are Trademarks of InterfaceH2O LLC Patents Pending All Rights Reserved

Step 3: Connect Floc Hog to your pumping system. If you use a smaller pump discharge than the 4" provided you will have to get an adapter that will allow your pump to connect.

Connect discharge hose to opposite end of Floc Hog and position the hose to discharge appropriately.

<u>Hint: The longer the discharge hose the more mix and</u> <u>reaction time the polymer will have to work. The more</u> <u>bends and twists will also enhancing the mixing effect</u> <u>making the polymer work more effectively.</u>

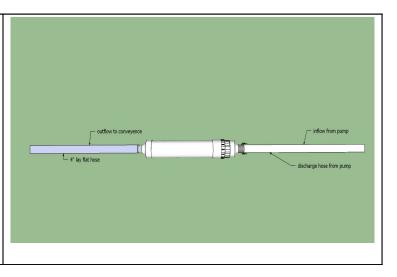

Specifications

- Flow capacity up to 500 GPM
- Holds 40 lbs of polymer
- Multiple Floc Hogs can be used with a single pump.
- Weighs 40 lbs (without polymers)
- Easy to store and clean
- Made to handle various pump pressures.
- Can be used with centrifugal or plunger pumps
- **O** Patent Pending



Water Matrix and Floc Hog are Trademarks of InterfaceH2O LLC Patents Pending All Rights Reserved