



Mud Mats

(Patent Pending)

*A Revolutionary
Product to Keep You
Out of the Mud!*



Site Access



Crossing Sensitive Areas



Alternative to Rock Entrance



Poor Site Conditions

- Easy to Deploy
- Allows For Site Access
- Poor Site Conditions
- Great for Residential & Commercial Construction
- Alternative to Rock Entrances
- Protects Turf & Sensitive Areas

Unroll this amazing new product and drive on any muddy, swampy ground without getting stuck, rutting or tracking mud off site.

Mud Mats consist of pocketed, double-wall, high-strength fabric with high tensile reinforcing ribs confined within each sleeve which allows for easy deployment and amazing structural stability.

Mats connect together to form custom sizes.

Ground pressure from vehicle tires is reduced up to 40x causing minimal ground disturbance!



www.interfaceh2o.com

616-931-5584

Light Weight

Quick to Deploy



Mud Mats


(Patent Pending)

Washes Easily

Reusable

AGES Mud Mat Specifications

Each mat is made up of a double layer of high strength woven fabric that is stitched in such a way to encapsulate the reinforcing members that run perpendicular to the direction of traffic. These reinforcing ribs are secured individually within each pocket. There are approx. 24-26 pockets that each holds 1 bamboo post of approx. 2" diameter. This combination of reinforcing member and confining fabric result in a portable mat that can be rolled up for transport and ease of deployment. AGES Mud Mats can be used in construction site access, agriculture, golf & parks, other soft or sensitive ground condition areas where vehicle access is required.

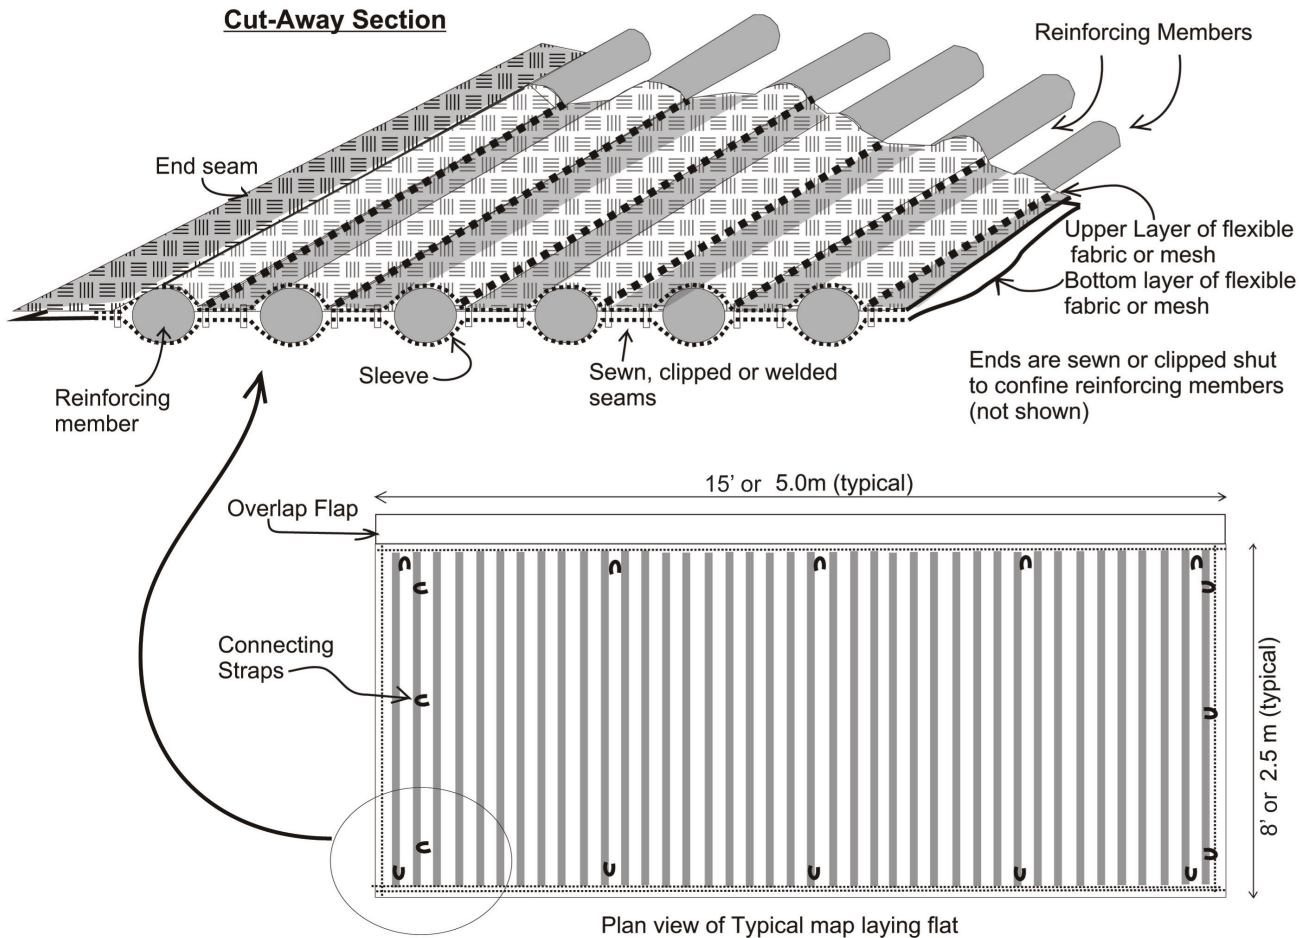

PROPERTY	TEST PROCEDURE	VALUE
Grab Tensile Strength	ASTM D4632	802.6 lbs.
Apparent Breaking Elongation	ASTM D4632	25% / 18%
Trapezoid Tearing Strength	ASTM D4533	607 lbs.
Puncture Resistance	ASTM D4833	374.3 lbs.
Mullen Burst	ASTM D3786	456.88 psi
Apparent Opening Size	ASTM D4751	70 US Sieve / 0.212mm
Constant Head Permittivity	ASTM D4491	20.16 g/m/ft ²
Wide Width Tensile	ASTM D4595	685.7 lbs./in.
Material	Woven Geotextile	100% Polypropylene

APPROXIMATE DIMENSIONS PER MAT	
Size Deployed (approx.)	15' x 8'
Shipping Size (rolled)	1.5' dia. x 8.5' long
Weight (approx.)	90 lbs

5 – carabiner clips for each mat (Side connection and end connection straps)



www.interfaceh2o.com

616-931-5584